

**RATINGS**

Durability (to BS 1088):	
100% Okoume:	non durable
100% Sapela:	moderately durable
Okoume/Sapela:	non durable
Veneer thickness (mm):	1.3 to 3.0
Panel thickness (mm):	3 to 40

CONDITIONS


Type Approval of Sapela plywoods is limited to that produced at the Sopegar S.A.S. facility only.

"This Certificate is not valid for equipment, the design, ratings or operating parameters of which have been varied from the specimen tested. The manufacturer should notify Lloyd's Register EMEA of any modification or changes to the equipment in order to obtain a valid certificate."

The attached Design Appraisal Document No. 03/00079(E1) and its supplementary Type Approval Terms and Conditions form part of this Certificate.

All other details remain as the previous Certificate No. 03/00079 to which this extension should be attached.

Certificate No.	03/00079(E1)
Issue Date	18 July 2006
Expiry Date	5 August 2008
Sheet	2 of 2

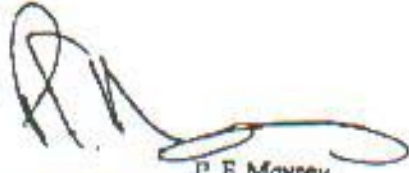

P. F. Maysey
London Design Support Services
Lloyd's Register EMEA

Lloyd's Register EMEA
71 Fenchurch Street, London EC3M 4BS

Lloyd's Register, its affiliates and subsidiaries and their respective officers, employees or agents are, individually and collectively, referred to in this clause as the "Lloyd's Register Group". The Lloyd's Register Group assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register Group entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.